


CYLINDERS

BETEX NDAC series, double acting

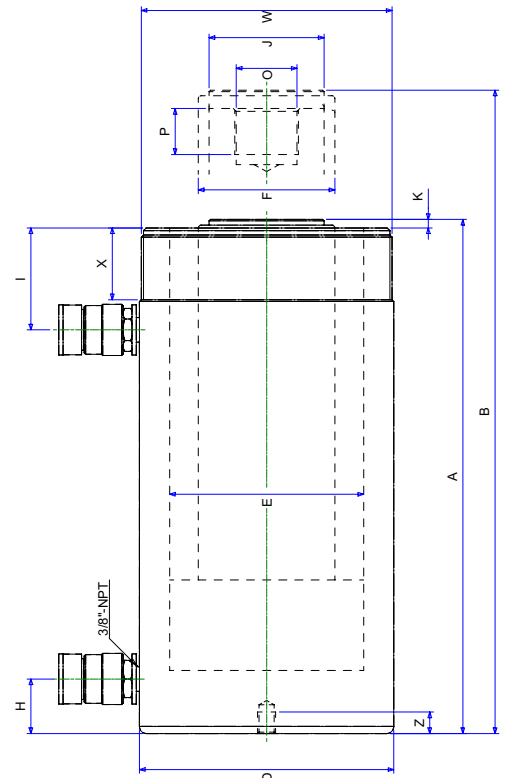


Model: NDAC series

Capacity : 10 - 100 ton
 Stroke : 150 - 460 mm
 Max. working pressure : 700 bar

- Perfect for construction, shipyards, utilities, mining and maintenance workshop.
- Hard chromed piston.
- Cylinders inside roll-polished, outside blasted with black nitride coating.



Overload valve

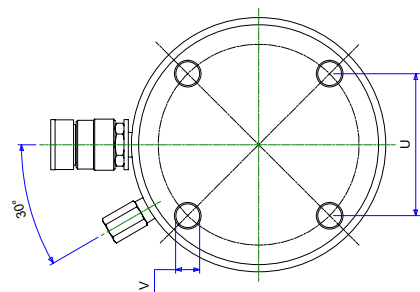

TIP! Use in combination with: hand- and foot pumps, page 55-67. Accessories, page 70-73

NDAC series

Type	Capacity ton		Stroke mm	Oil cap cm ³			A Height mm		B Retracted	B Extended	D ø mm	E ø mm	F ø mm	H mm	I mm	J ø mm	K mm	O ø un	P mm	U mm	V mm	Z mm	W ø un	X mm	Weight Kg
	Push	Pull		Push	Pull	Retracted	Extended																		
NDAC1010	10	4	251	399	144	408	659	78	45	36	36.5	55	40	8	1"-8	25.4	-	-	-	2 1/4"-14	27	13			
NDAC1012	10	4	301	478	172	458	759	78	45	36	36.5	55	40	8	1"-8	25.4	-	-	-	2 1/4"-14	27	15			
NDAC2512	25	13	305	1500	720	470	775	101	56	50	36	26	50	10	1 1/2"-16	25.4	-	-	-	4"-12	40	29			
NDAC308	30	14	209	923	426	387	596	103	75	55	25	75	50	12	1 1/2"-16	25.4	-	-	-	4"-12	50	20			
NDAC3014	30	14	368	1625	751	547	915	103	75	55	25	75	50	12	1 1/2"-16	25.4	-	-	-	4"-12	50	29			
NDAC506	50	14	150	1062	309	331	481	127	95	80	30	70	70	5	1"-12	25.4	-	-	-	5"-12	50	29			
NDAC5013	50	14	330	2338	680	511	841	127	95	80	30	70	70	5	1"-12	25.4	-	-	-	5"-12	50	43			
NDAC5018	50	14	470	3330	968	675	1145	127	95	80	52	70	70	5	1"-12	25.4	88.9	5/8"-11	22	5"-12	50	59			
NDAC756	75	29.5	155	1752	654	348	503	152	120	95	30	75	70	5	1"-12	38	114.3	3/4"-10	22	5 3/4"-12	45	40			
NDAC7513	75	29.5	333	3764	1405	526	859	152	120	95	30	75	70	5	1"-12	38	114.3	3/4"-10	22	5 3/4"-12	45	58			
NDAC1006	100	43	160	2289	1155	358	518	177	135	95	38	71	80	5	1 3/4"-12	35	139.7	3/4"-10	25	6 7/8"-12	50	59			
NDAC10013	100	43	330	4721	2383	528	858	177	135	95	38	71	80	5	1 3/4"-12	35	139.7	3/4"-10	25	6 7/8"-12	50	83			